

# Domes



**Domes are dedicated to the protection and cover of sensitive equipment such as radars, missiles, vehicles or helicopters under extreme climate conditions.**

Composed of a galvanized steel frame and a heavy-duty PVC coated fabric cover, the domes are available in standard diameters of 9, 11, 13, 16 and 20 metres.

The dome shelters can open extremely fast : operated by an electric gearbox, the opening and closing of the dome takes less than 30 seconds and is fitted with a manual safety system.

Worldwide service and support are provided by our specialised technicians.

Additional equipment :

- Heater.
- Air conditioning.
- Lighting.
- Humidity control.


Fabric colours :

- White
- Sand
- Camouflage
- Others

Load resistance :

- Wind load : 204 km/h
- Snow load : 110 daN/m<sup>2</sup>



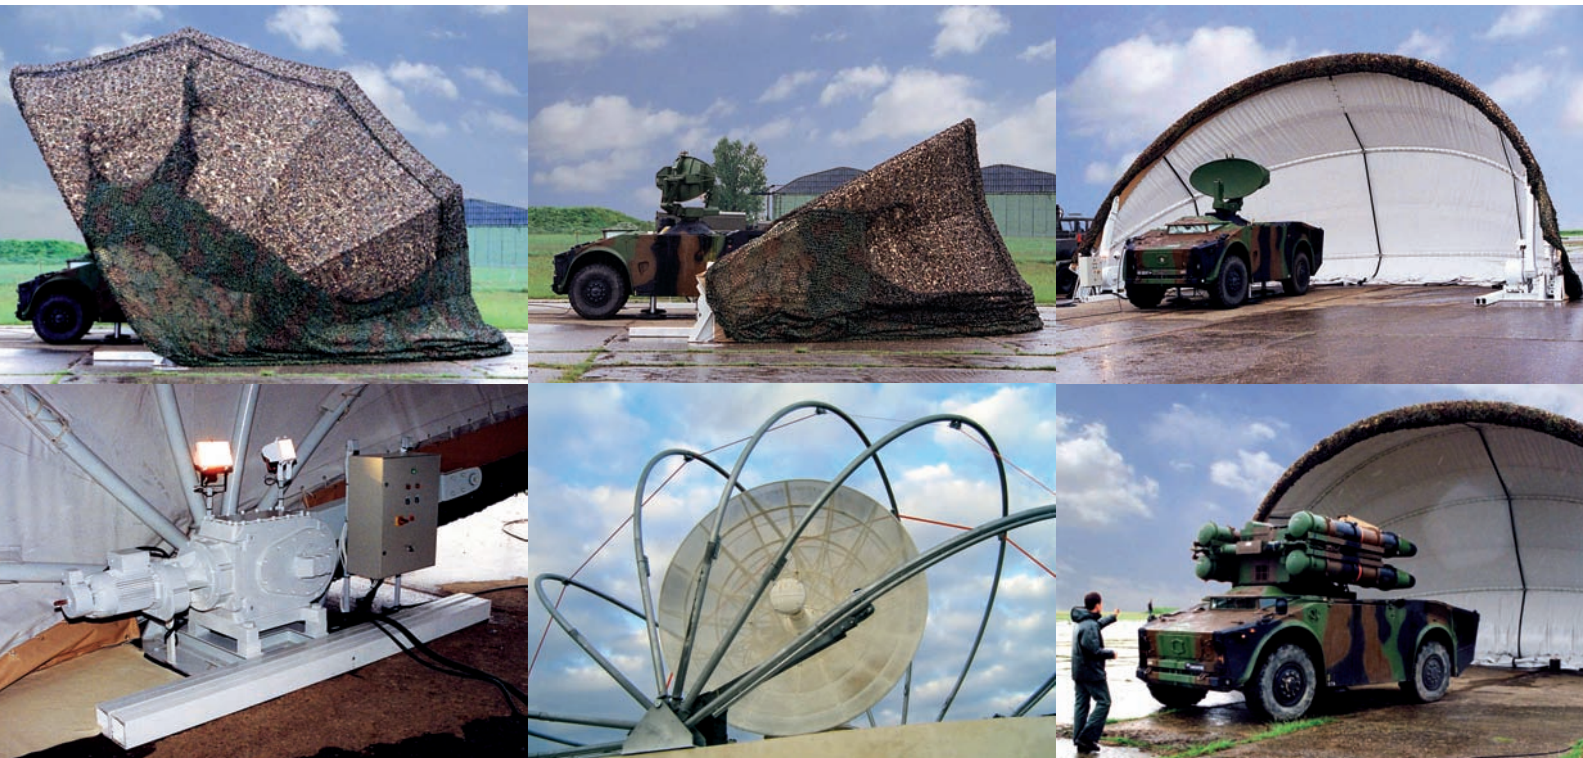

Radome Type (diameter)	9 m	11 m	13 m	16 m	20 m
Height (m)	5.00	6.00	7.00	9.00	11.50
Volume (m <sup>3</sup> )	200	360	580	1,000	1,500
Weight (kg)	2,900	4,100	5,700	8,500	12,000
Staff (persons)	3	3	3	3	3
Setup time (day)	2	2	2	3	4
Transport (container ISO 20')	1	1	2	2	3

NOTE : We reserve the right to make changes and alterations that optimise our products or to ensure they correspond to the latest technology and specifications.

France  
 Losberger Rapid Deployment Systems SAS  
 58 A rue du Dessous des Berges  
 75013 Paris  
 Phone: +33 1 46 72 42 69  
 Fax: +33 1 46 58 91 79  
 E-Mail: [info@losberger-rds.com](mailto:info@losberger-rds.com)  
[www.losberger-rds.com](http://www.losberger-rds.com)

Germany  
 Losberger RDS GmbH  
 Fürfeld · Gottlieb-Daimler-Ring 14  
 74906 Bad Rappenau  
 Phone: +49 7066 980-0  
 Fax: +49 7066 980-232  
 E-Mail: [rds@losberger.com](mailto:rds@losberger.com)  
[www.losberger-rds.com](http://www.losberger-rds.com)

Losberger brands : Losberger, Bachmann, TMB

