

NBC tent type AP 15



The steel framed NBC tents are prepositioned in risk full locations for the collective protection of people.

Up to 30 people can live inside an AP 15 without personal protection in a location at risk of NBC attack.

Two AP 15 modules can be connected to form an AP 30, fitted with an access hatch and escape hatch, to accommodate 60 people.

An AP 30 can be transported on 2 pallets of 20 feet.

The AP 15 system can be installed in two days by 5 people, who will wait for activation inside the AP 15. It provides easy access and safe housing for the accommodated personnel.

The floor is secured to the ground with stakes and can be supplemented by ballast transport boxes filled with water or sand.

Worldwide service and assistance are provided by our specialised technicians.

Available equipment :


- Air conditioning.
- Heating.
- Dehumidification.
- Lighting.
- NBC filter system, (300 m³/h for an AP 15).

Fabric colours :

- Sand
- NATO green
- UN white

Load resistance :

- Wind : 180 km/h
- Snow : 100 daN/m²

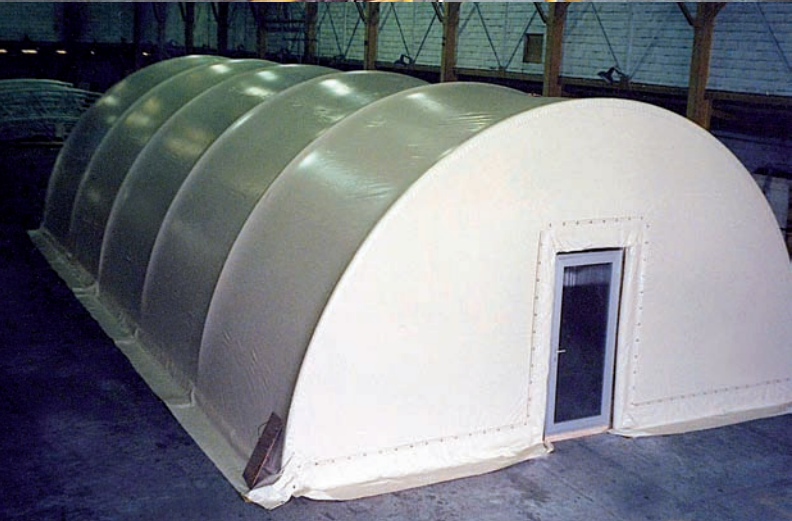

Technical specifications			
External dimensions (m)	L = 15.00	W = 8.00	H = 4.00
Internal liner dimensions (m)	L = 13.00	W = 8.00	H = 2.50
Dimensions of airlock (m)	L = 2.00	W = 1.00	H = 2.00
Packing (m) - 6 boxes of - 1 box (airlock) of	L = 4.04 L = 2.00	W = 0.64 W = 2.00	H = 0.65 H = 0.50
Total weight (kg)	2,553		
Total volume (m)	L = 5.55	W = 1.92	H = 1.80

NOTE : We reserve the right to make changes and alterations that optimise our products or to ensure they correspond to the latest technology and specifications.

France
 Losberger Rapid Deployment Systems SAS
 58 A rue du Dessous des Berges
 75013 Paris
 Phone: +33 1 46 72 42 69
 Fax: +33 1 46 58 91 79
 E-Mail: info@losberger-rds.com
 www.losberger-rds.com

Germany
 Losberger RDS GmbH
 Fürfeld · Gottlieb-Daimler-Ring 14
 74906 Bad Rappenau
 Phone: +49 7066 980-0
 Fax: +49 7066 980-232
 E-Mail: rds@losberger.com
 www.losberger-rds.com

Losberger brands : Losberger, Bachmann, TMB

